


LR6-60OPH 340~360M

Hi-MOX

High Efficiency Low LID Mono PERC with OVERLAP Technology to Deliver Superior Power with Aesthetic Appearance

12-year Warranty for Materials and Processing;
25-year Warranty for Extra Linear Power Output

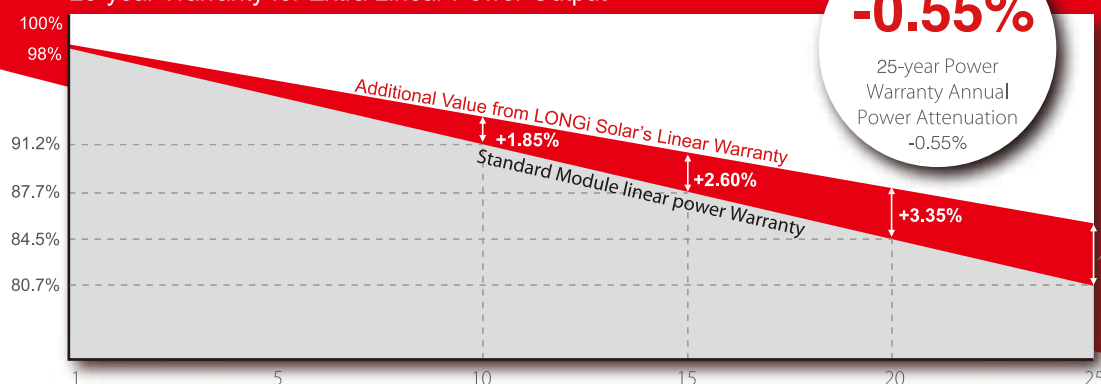

-0.55%

25-year Power
Warranty Annual
Power Attenuation
-0.55%

+4.10%

Complete System and Product Certifications

IEC 61215, IEC 61730

ISO 9001:2008: ISO Quality Management System

ISO 14001: 2004: ISO Environment Management System

OHSAS 18001: 2007 Occupational Health and Safety



* Specifications subject to technical changes and tests.
LONGi Solar reserves the right of interpretation.

Positive power tolerance (0 ~ +5W) guaranteed

High module conversion efficiency (up to 20.6%)

Slower power degradation enabled by Low LID Mono PERC technology: first year <2%,
0.55% year 2-25

Better energy yield with excellent low irradiance performance and temperature coefficient

Robust frame (35mm) withstands mechanical loading of 5400Pa for snow load on front
and 2400Pa for wind load on rear side

LONGi


Room 801, Tower 3, Lujiazui Financial Plaza, No.826 Century Avenue, Pudong Shanghai, 200120, China
Tel: +86-21-80162606 E-mail: module@longi-silicon.com Facebook: www.facebook.com/LONGi Solar

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.

20200401V11

LR6-60OPH 340~360M

Design (mm)

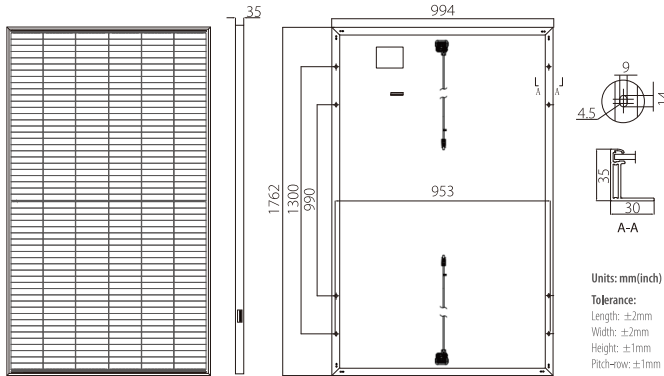

Mechanical Parameters

Cell Orientation: 6 parallels & 2 series
 Junction Box: IP67, two diodes
 Output Cable: 4mm², positive pole 800mm,
 negative pole 400mm,
 length can be customized
Connector: EVO2 (Staubli)
 Glass: Single glass
 3.2mm coated tempered glass
 Frame: Anodized aluminum alloy frame
 Weight: 19.0kg
 Dimension: 1762×994×35mm
 Packaging: 30pcs per pallet
 180pcs per 20'GP
 780pcs per 40'HC

Operating Parameters

Operational Temperature: -40 °C ~ +85 °C
 Power Output Tolerance: 0 ~ +5 W
 Voc and Isc Tolerance: ±3%
 Maximum System Voltage: DC1500V (IEC)
 Maximum Series Fuse Rating: 20A
 Nominal Operating Cell Temperature: 45±2 °C
 Safety Class: Class II
Fire Rating: IEC Class C

Electrical Characteristics

Test uncertainty for Pmax: ±3%

Model Number	LR6-60OPH-340M		LR6-60OPH-345M		LR6-60OPH-350M		LR6-60OPH-355M		LR6-60OPH-360M	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	340	251.9	345	255.6	350	259.3	355	263.0	360	266.7
Open Circuit Voltage (Voc/V)	38.1	35.6	38.3	35.7	38.5	35.9	38.7	36.1	38.9	36.3
Short Circuit Current (Isc/A)	11.62	9.37	11.72	9.45	11.81	9.52	11.91	9.60	11.99	9.67
Voltage at Maximum Power (Vmp/V)	31.4	29.0	31.6	29.2	31.8	29.4	32.0	29.6	32.2	29.7
Current at Maximum Power (Imp/A)	10.83	8.68	10.92	8.76	11.01	8.83	11.10	8.90	11.18	8.97
Module Efficiency(%)	19.4		19.7		20.0		20.3		20.6	

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25 °C, Spectra at AM1.5

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20 °C, Spectra at AM1.5, Wind at 1m/s

Temperature Ratings (STC)


Temperature Coefficient of Isc: +0.057%/°C
 Temperature Coefficient of Voc: -0.286%/°C
 Temperature Coefficient of Pmax: -0.370%/°C

Mechanical Loading


Front Side Maximum Static Loading: 5400Pa
 Rear Side Maximum Static Loading: 2400Pa
 Hailstone Test: 25mm Hailstone at the speed of 23m/s

I-V Curve


Current-Voltage Curve (LR6-60OPH-350M)



Power-Voltage Curve (LR6-60OPH-350M)



Current-Voltage Curve (LR6-60OPH-350M)



LONGi

LONGi Green Energy Technology Co Ltd
 Suite 17.02, 570 George Street, Sydney NSW 2000
 Tel: 1800 328 888 Email: au@longi.com Web: www.longi.com/au

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.

Made in China

20200401V11